


# LASAL™ JET NOZZLE

- Improves and simplifies welding operations
- Optimizes welding costs
- Easy to install and low maintenance

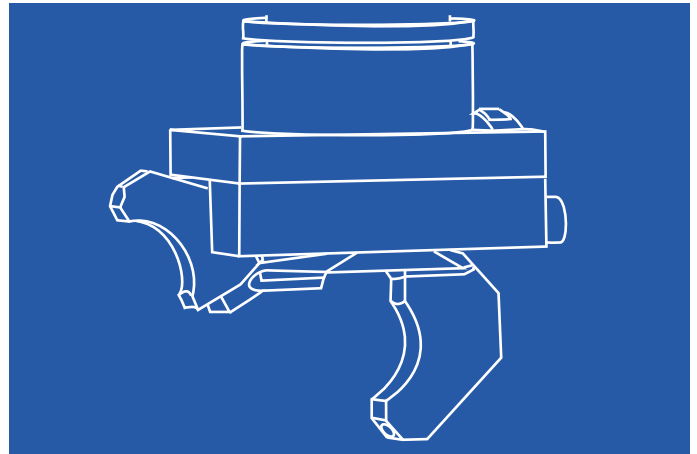

## The Concept

A robust and easy-to-use patented nozzle for linear welds, **LASAL™ JET NOZZLE** is specially designed to avoid gas plasma with CO<sub>2</sub> laser sources and to reduce metallic vapor plume extension above the weld pool with solid-state laser.

A dynamic gas jet makes it possible to use Argon in all welding configurations, even for the highest CO<sub>2</sub> laser power (up to 12 kW). This results in an optimal laser-beam energy transfer and a high weld quality.


## Industries

**LASAL™ JET NOZZLE** is ideal for manufacturers that extensively use laser for linear welds, such as automotive and tube manufacturers:

- Tailored blanks for Automotive industry.
- Tube and profile manufacturing.
- Short tube length (chimney, exhaust systems, etc).
- Continuous tube welding (heat exchanger, chemical and oil & gas piping, furniture).
- Structural pipes.

## Features

The shielding gas distribution nozzle is a key operational component which has a direct effect on the efficiency of the laser welding process. A dynamic blowing of gas plasma allows the use of Argon in all welding configurations resulting in cost savings and quality improvement.

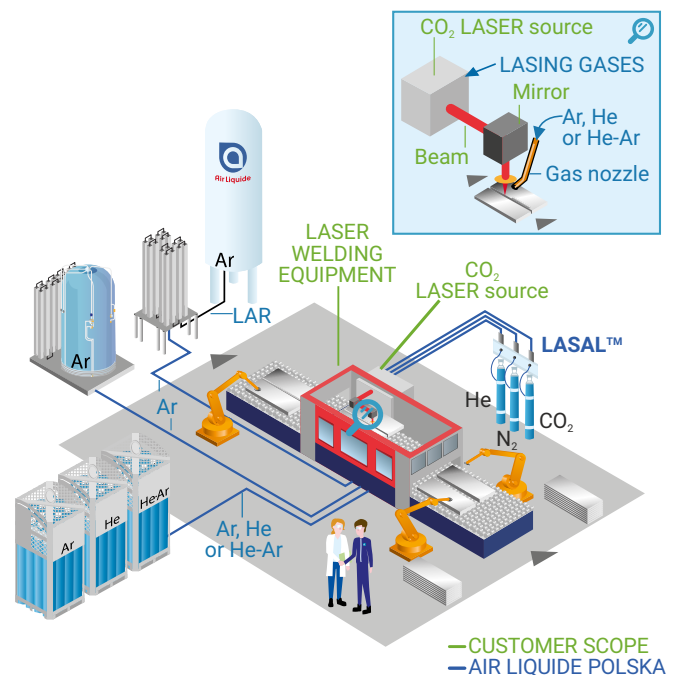

**LASAL™ JET NOZZLE** is designed with a massive brass block equipped with two gas outputs:

- The main gas output prevents gas plasma and plume formation while also reducing fumes and spatter emissions.
- The second gas output is shielding the weld bead from air contamination resulting in an improvement of the weld quality.

**LASAL™ JET NOZZLE** includes a setup finger device to easily position the nozzle in regards to the laser beam focus point. In addition to **LASAL™ JET NOZZLE**, a XYZ positioning device is proposed.

## Model Range

**LASAL™ JET NOZZLE** has only one version as it can be adapted to all laser sources.

## Technical Data

LASAL™ JET NOZZLE	
Size – L x W x H (mm)	64 x 157 x 137
Nominal Ar flow rate (Nl/min)	40
Weight (g)	970

### Contact Us

.....  
Air Liquide Polska Sp. z o.o.  
ul. Jasnogórska 9, 31-358 Kraków  
tel.: +48 12 627 93 00  
e-mail: [airliquide.polska@airliquide.com](mailto:airliquide.polska@airliquide.com)

[pl.airliquide.com](http://pl.airliquide.com)



A world leader in gases, technologies and services for Industry and Health, Air Liquide is present in 75 countries with approximately 66,400 employees and serves more than 3.8 million customers and patients.